



Target Pollutants
Dissolved metals
Roof litter

**Removes other metals, too!**

Zinc-B-Gone<sup>®</sup>, a cost-effective, standalone water polishing technology, provides an advanced level of stormwater treatment. Designed specifically for filtration of rooftop runoff or other relatively clear water source, these units reduce zinc and other dissolved metals to below benchmarks or action levels. Zinc-B-Gone is available in various sizes, from a unit for an individual downspout (basic), to larger sizes for combined downspouts (pro). All sizes are effective and economical to operate and maintain.



### Zinc-B-Gone<sup>®</sup> basic

*for individual downspout applications*

- Super duty tank for many years of service
- Rated at 15 gpm
- Fits 3" - 4" round or square downspouts
- Ideal for TSS <10 mg/L
- Contains 10 lb. dissolved zinc and other metals removal capacity
- Over 400,000 gallons treatment capacity
- Reversible: right inlet/outlet or left inlet/outlet
- Integrated, cleanable debris screen
- Drain port for winterization
- Do-it-yourself installation and maintenance with forklift pockets
- Compact design: L 46 in., W 26 in., H 42 in.; 950 lbs.
- Lockable lid

### Zinc-B-Gone<sup>®</sup> pro

*for large-scale roof-runoff applications*

- Super duty tank for many years of service
- Rated from 25 gpm to 1200 gpm, dependent on model
- Separate pretreatment and filtration chambers for reduced maintenance
- Internal high flow bypass, totalizing flow meter, flow control valve, inlet and outlet sample ports
- Includes factory assistance for installation
- Cover, freeze protection and other options available


StormwaterRx LLC designs, manufactures, installs and maintains stormwater treatment systems for industrial customers throughout North America. Contact StormwaterRx to find out how we can help you meet your stormwater quality requirements.



Call toll free 800.680.3543 or visit [stormwaterx.com](http://stormwaterx.com)


# Performance

**Total Zinc**

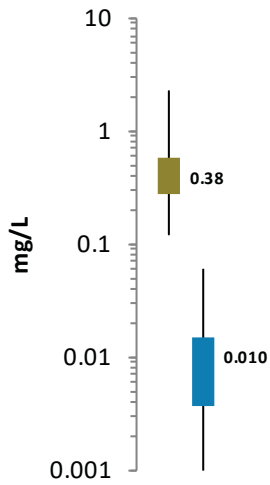


Median Removal Efficiency: 98%

**Total Copper**

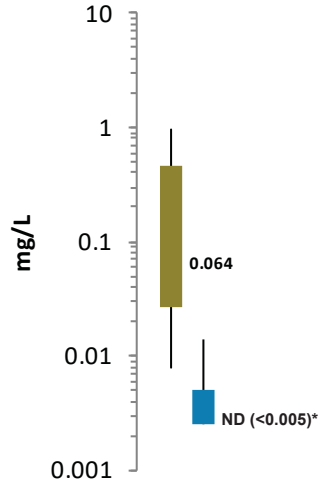

Median Removal Efficiency: 96%

**Total Lead**

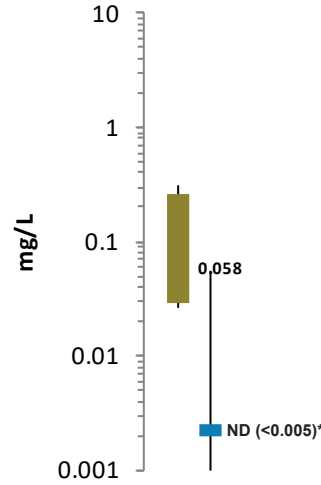

Median Removal Efficiency: 94%

**How to read the plots:**

- Before treatment
- After treatment

Reported values are median of respective sample sets.

**Box Range** = 25<sup>th</sup> - 75<sup>th</sup> percentile

**Whisker Range** = 5<sup>th</sup> - 95<sup>th</sup> percentile

\*nondetect value, reported at 1/2 the detection limit.



*Zinc-B-Gone basic*



*Zinc-B-Gone 50 pro*